


Lupo
Made in Italy

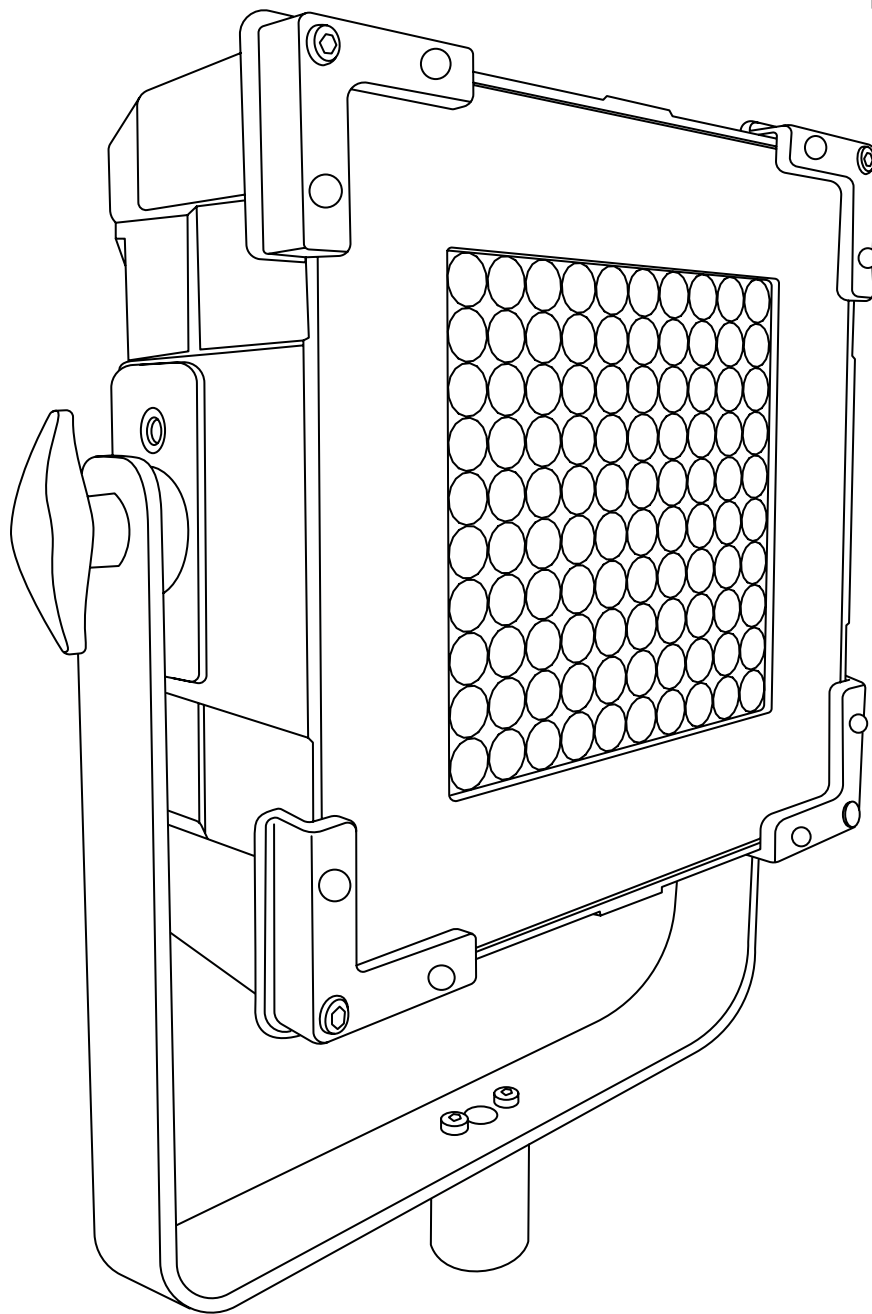

Cod 602 PRO

ActionpanelPRO
Full Color Hard

Technical Data

Dimensions (cm)	261 x 261 x 125 mm
Dimensions (in)	10,2 x 10,2 x 4.9 in
Weight (kg)	3.8 kg
Weight (lb)	8.3 lb
CRI (Colour Rendering Index)	96
TLCI (Television Lighting Consistency Index)	98
Estimated LED lifetime (L80)	50,000 hours
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
Connection for 14.8 V battery with jack connector	included
Standard XLR 5 pin connectors to DMX console	included
DMX module	included
DMX (bit)	8 bit / 16 bit
Watt consumption	60 W
Firmware upgrades	through USB port
Colour temperature	2800 K - 10000 K
Voltage AC	90 V - 240 V
Light beam	40°
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power factor	0.96

Photometric data	6500 K	5600 K	3200 K
Distance			
Lux at 1 m - 3.2 ft	6000	6000	5000
Lux at 2 m - 6.5 ft	1500	1400	1200
Lux at 3 m - 9.8 ft	650	620	540
Lux at 4 m - 13.1 ft	350	350	300
Lux at 5 m - 16.4 ft	230	230	200

Mode Options

CCT (Correlated Color Temperature)

Mode for variable color temperature control from 2700 K to 10000 K with the addition of plus and minus green/magenta offset.

HSI (Hue, Saturation and Intensity)

Mode for full color control.





RGBW

Mode for control of Red, Green, Blue and White independently.





Preset

Mode for a selected variety of gels.

Technical Drawing

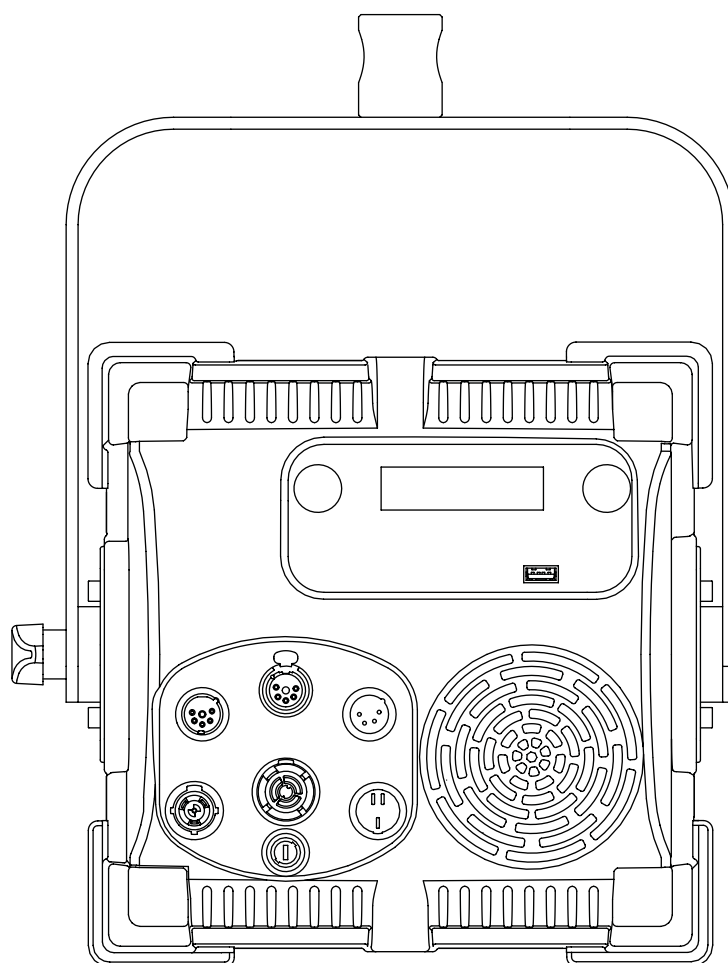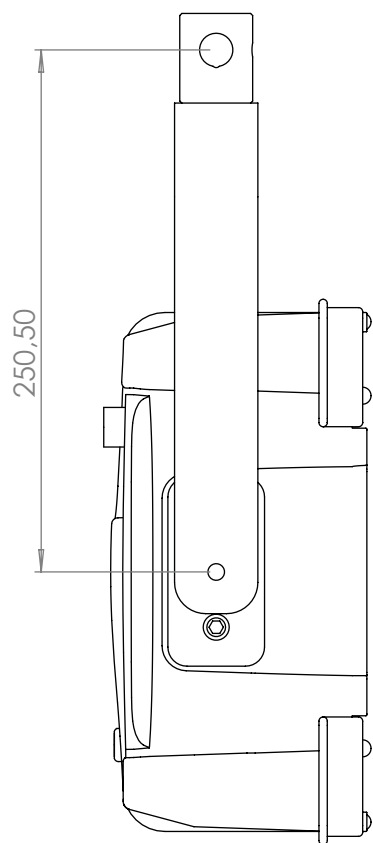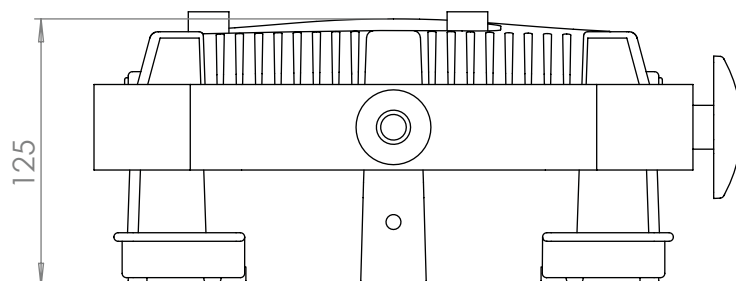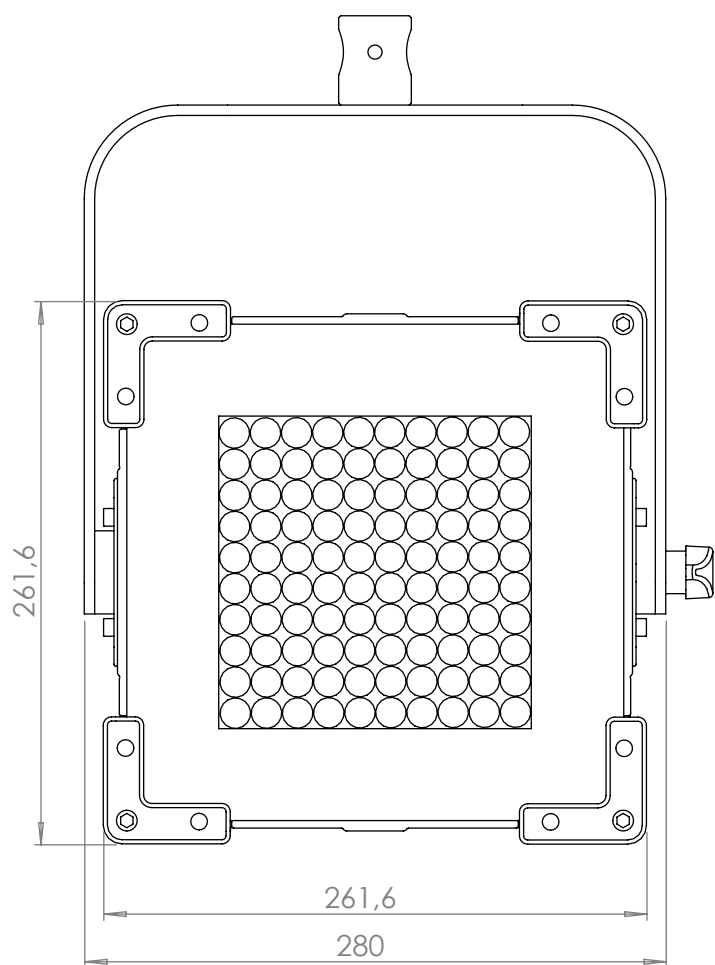

Pole Operated Yoke

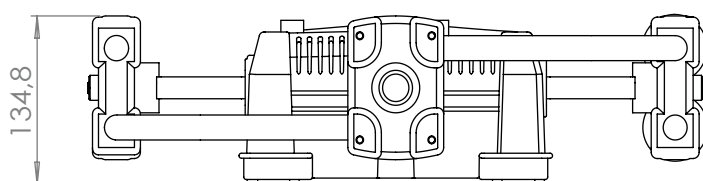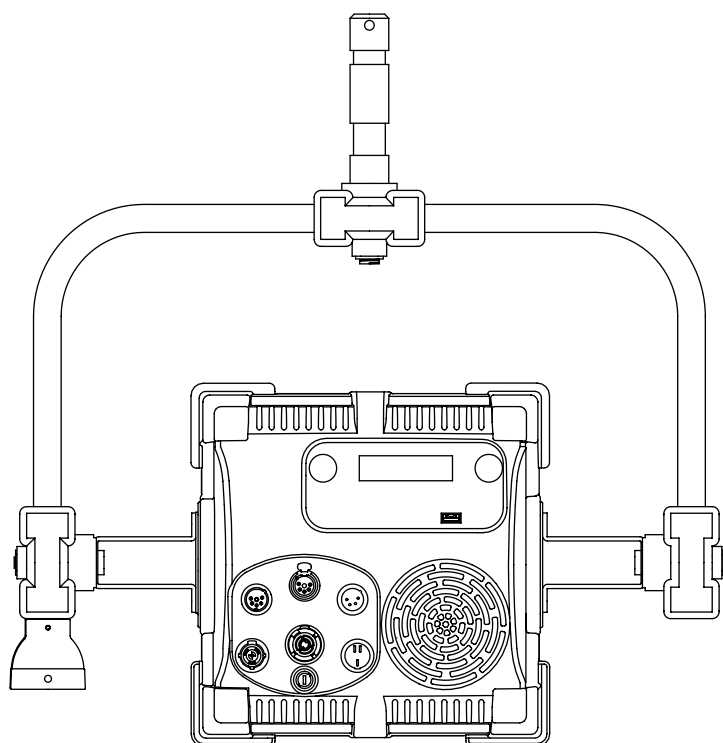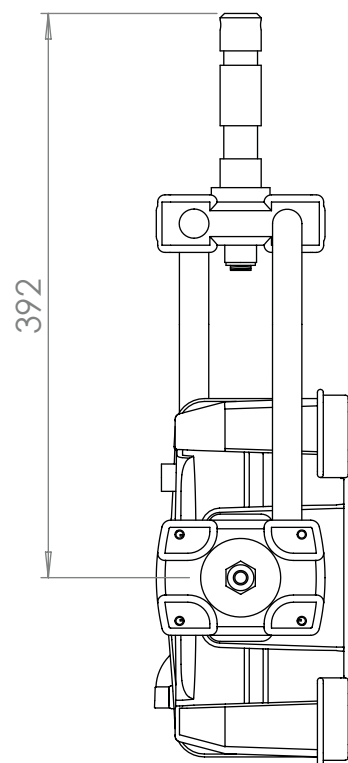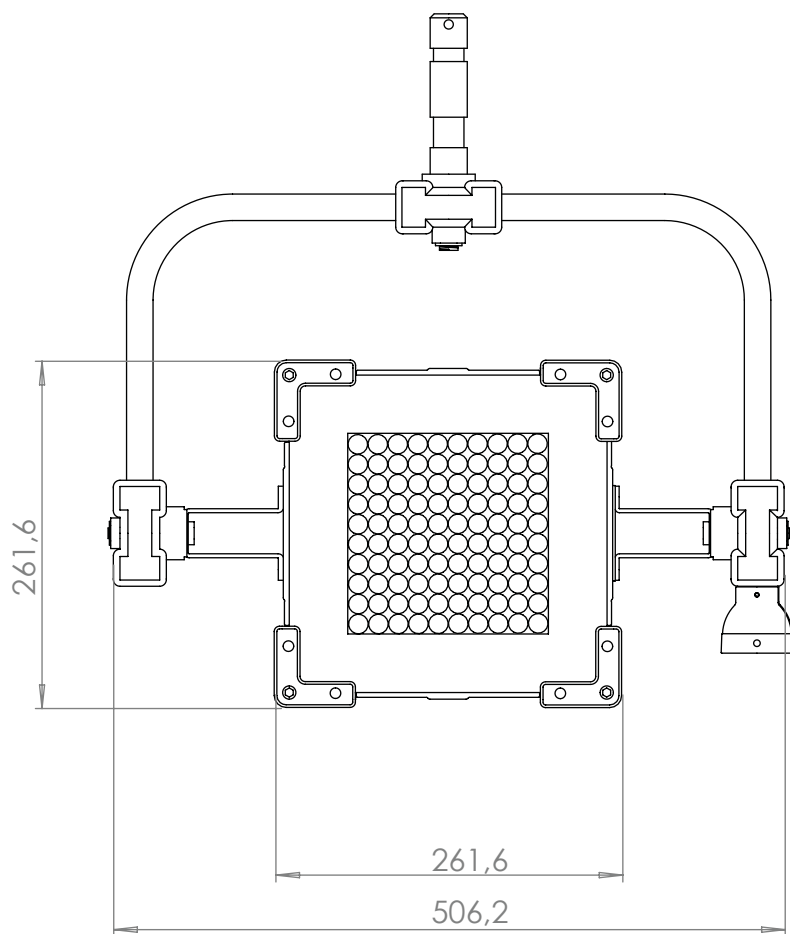

Lupo
Made in Italy

eqc
extreme quality control

Lupo srl - Via V. Sassi 28/30 Collegno (TO) - 10093 - Italy

Phone: +39 011 411 9919 / **e-mail:** contact@lupo.it / **website:** www.lupo.it

Extreme Quality Control S.L. - Calibre 55 - Collado Villalba - 28400 - Madrid, Spain

Phone: +34 918 505 087 / **e-mail:** info@eqcgrupo.com / **website:** www.eqcgrupo.com