


**Important:** Read All Instructions Prior to Installation

## Function introduction

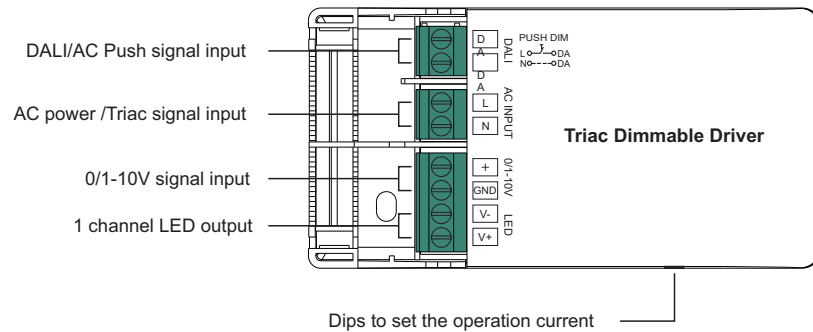


## Product Data

|            |                       |  |       |       |       |
|------------|-----------------------|--|-------|-------|-------|
| Output     | LED Channel           | 1                                      |       |       |       |
|            | Selectable Current    | 200mA                                  | 250mA | 300mA | 350mA |
|            | DC Voltage Range      | 6-42V                                  | 6-40V | 6-33V | 6-28V |
|            | Current Accuracy      | ±3%                                    |       |       |       |
|            | Rated Power           | 10W max.                               |       |       |       |
| Input      | Voltage Range         | 220-240V AC                            |       |       |       |
|            | Frequency             | 50/60Hz                                |       |       |       |
|            | Power Factor (Typ.)   | >0.9                                   |       |       |       |
|            | Efficiency (Typ.)     | > 80% @ 230VAC                         |       |       |       |
|            | Input Current         | 55mA @ 230VAC                          |       |       |       |
|            | Inrush Current (Typ.) | COLD START Max. 2A @ 230VAC            |       |       |       |
| Control    | Dimming Interface     | DALI/Push+Triac+0/1-10V                |       |       |       |
|            | Dimming Range         | 1%-100%                                |       |       |       |
|            | Dimming Method        | Amplitude dimming (No output PWM)      |       |       |       |
| Protection | Short Circuit         | Yes, auto recovery after fault removed |       |       |       |
|            | Over Current          | Yes, auto recovery after fault removed |       |       |       |
|            | Over Temperature      | Yes, auto recovery after fault removed |       |       |       |

|             |                          |   |
|-------------|--------------------------|---|
| Environment | Working Temp.            | -20°C ~ +45°C   |
|             | Max. Case Temp.          | 85°C  |
|             | Working Humidity         | 10% ~ 95% RH non-condensing                                       |
|             | Storage Temp. & Humidity | -40°C ~ +80°C, 10% ~ 95% RH                                       |
| Safety&EMC  | Safety Standards         | EN61347-1, EN61347-2-13   |
|             | Withstand Voltage        | I/P-O/P: 3.75KVAC   |
|             | EMC Emission             | EN55015, EN61000-3-2, EN61000-3-3                                 |
|             | EMC Immunity             | EN61547, EN61000-4-2,3,4,5,6,8,11, surge immunity Line-Line 0.5KV |
| Others      | MTBF                     | 193.6K hrs min.@ 230VAC at full load and 25°C ambient temperature |
|             | Dimension                | 103.7*52.6*30mm (L*W*H)   |

- Dimmable LED driver with DALI/Push+Triac+0/1-10V dimming interfaces
- 1 channel constant current output, max. output power 10W
- Output current 200mA-350mA selectable by DIP switch
- Enables to control single color LED lighting
- Class II power supply, full isolated plastic case
- High power factor and efficiency
- Complies to IEC 62386-101, IEC 62386-102, IEC 62386-207
- Compatible with universal DALI masters that support DT6 commands
- Compatible with universal Triac dimmers
- Compatible with universal 0/1-10V dimmers
- Analog current control, no PWM output, flicker free
- IP20 rating, suitable for indoor LED lighting applications

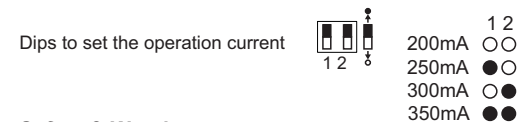

## Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT set the operation current with power applied
- DO NOT expose the device to moisture.

## Operation

### 1. Dimming Interface Selection

- The LED driver supports 4 kinds of dimming input: DALI, Push, Triac, 0/1-10V.
- Please select any of the 4 dimming interfaces to wire each time.
- To connect a new dimming interface, previously connected dimming interface must be disconnected.
- DO NOT connect more than 2 (including 2) dimming interfaces simultaneously.

### 2. DALI Address Assigned by DALI Masters

While connected with DALI interface, 1 DALI address can be assigned by DALI Master controller automatically, please refer to user manuals of compatible DALI Masters for specific operations.

### 3. PUSH Dimmer Mode

While connected with a AC PUSH, the driver will be in Push Dimmer Mode, operations under Push Dimmer Mode are as follows:


1. Click the button to switch ON/OFF
2. Press and hold down the button to increase or decrease light intensity to desired level and release it, then repeat the operation to adjust light intensity to opposite direction. The dimming range is from 1% to 100%.
3. Memory function after power off or power failure enables the device to memorize the status before power off while power on again.

#### 4. Triac Dimming Input


While connected with a Triac dimmer, different Triac dimmers from different suppliers may have different minimum dimming levels which the driver can not be dimmed below. To dim to 1%, please make sure the dimmer supports 1% minimum dimming level.

#### Wiring Diagram



##### 1. With DALI bus

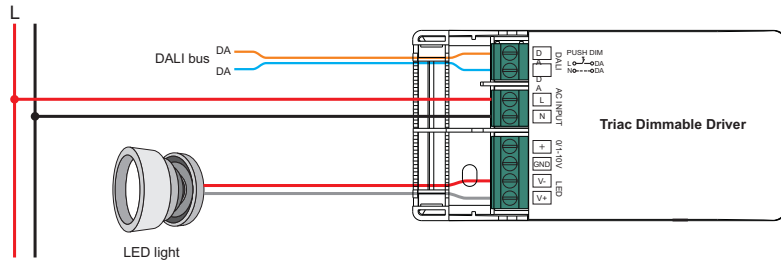


##### 2. With PUSH dimmer

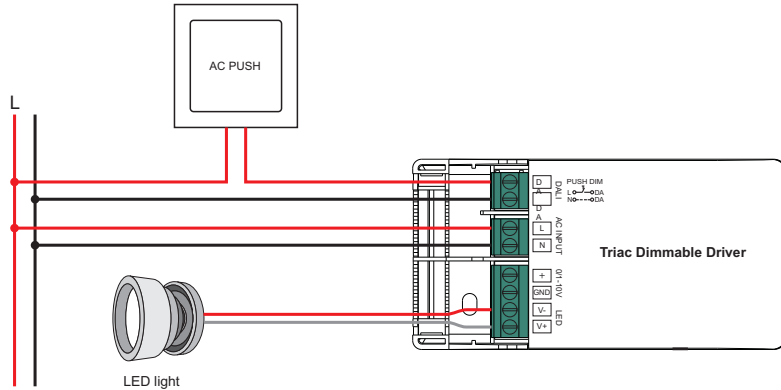

##### 3. With Triac dimmer

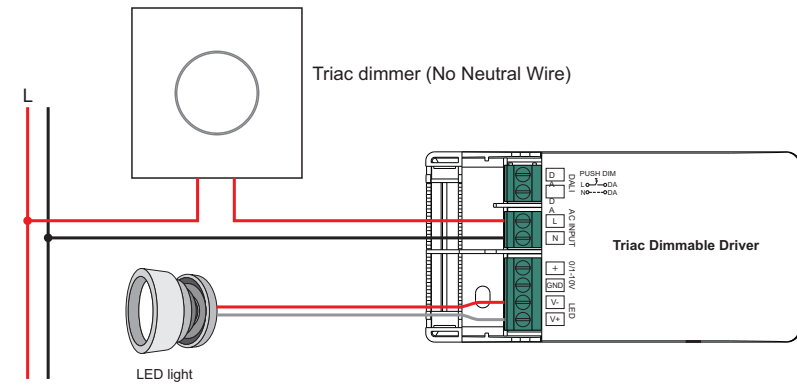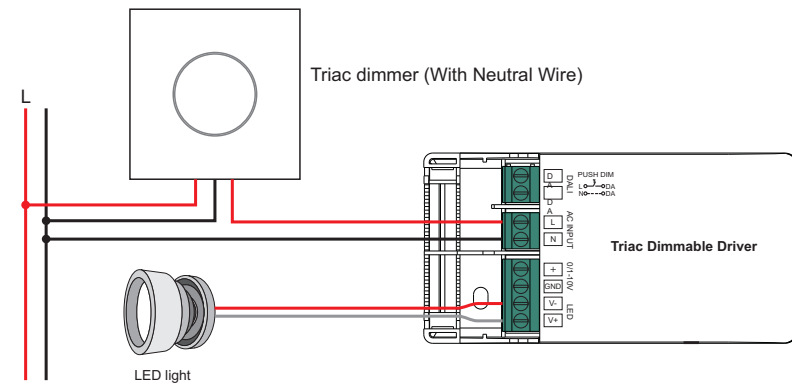

##### 4. With 0/1-10V dimmer

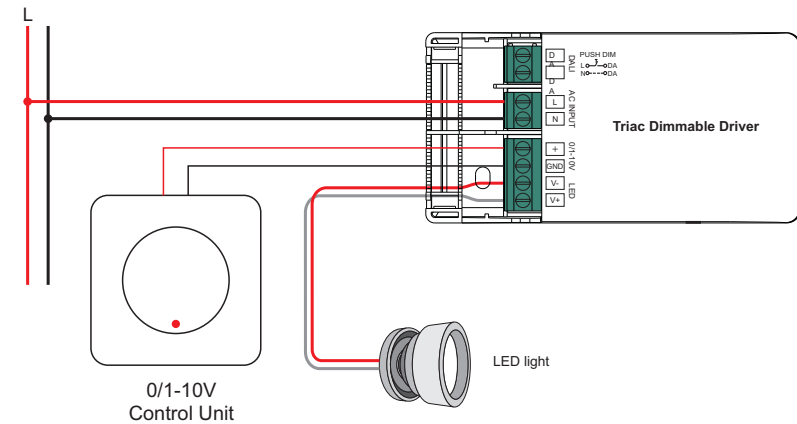

#### Product Dimension

